


BS88, IEC269 Industrial HRC Fuse Links

Centre Bolted Tags 415V ac and 550V ac for Motor Rated


EF

Time-Current Characteristic Curves


Non Motor Rated

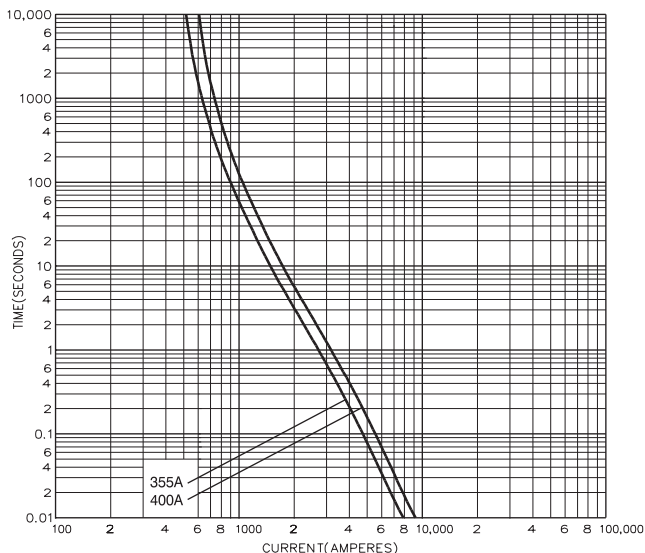


Motor Rated

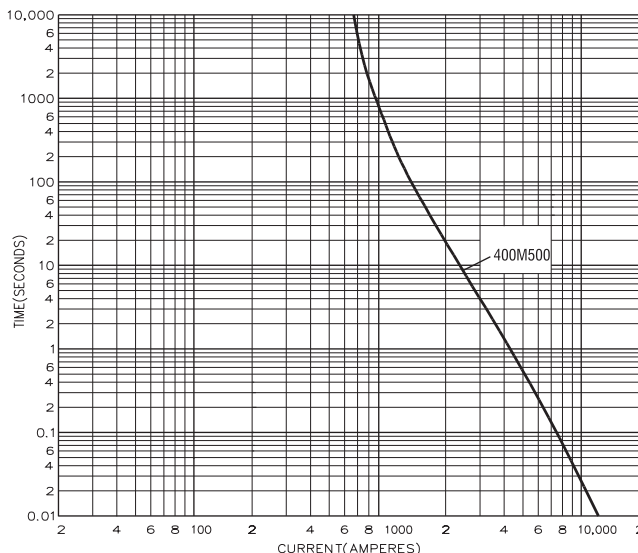

Dimensional Data

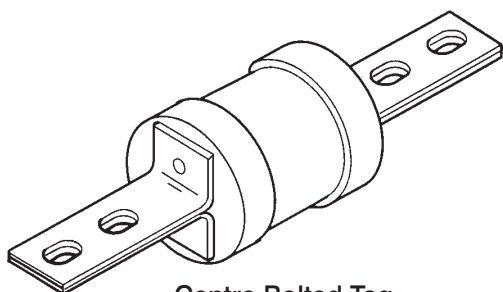

Centre Bolted Tag

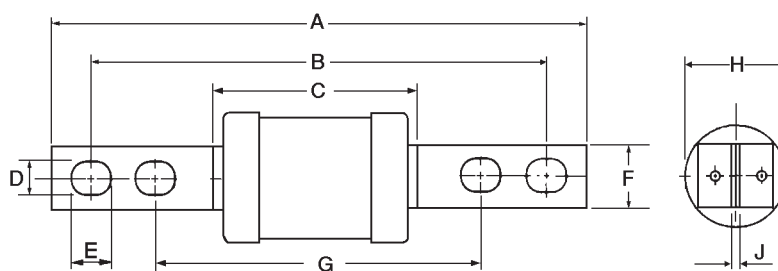

| Catalog Number | I ² t (Amps ² Secondsx 10 ³) | | | Nom. Watts Loss | Rated Voltage | Dimensions (mm) | | | | | | | | |
|----------------|--|------------|---------------|-----------------|---------------|-----------------|-------|------|------|------|------|-------|------|-----|
| | Amp Ratings | Pre-Arcing | Total at 415V | | | A | B | C | D | E | F | G | H | J |
| EF355 | 355 | 360 | 865 | 24 | 415 ac | 209.0 | 184.0 | 50.0 | 10.5 | 12.5 | 25.4 | 133.0 | 38.0 | 4.7 |
| EF400 | 400 | 475 | 1,150 | 29 | | 210.0 | 187.0 | 75.0 | | | | 136.0 | 59.0 | |
| EF400M500 | 400M500 | 1,200 | 2,700 | 27 | 550 ac | 210.0 | 187.0 | 75.0 | 15.5 | | | 136.0 | 59.0 | |

Packaging - 1 per carton

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Bussmann Division
Cooper (U.K.) Ltd
 Burton-on-the-Wolds
 Leicestershire, LE12 5TH
 United Kingdom
 Tel: (44) (0)1509 88 27 37
 Fax: (44) (0)1509 88 27 86

Head Office
 St. Louis, MO, U.S.A. Tel: (314) 527-3877 Fax: (800) 544-2570 International Fax: (314) 527-1445



Bussmann Information Fax (00 1) 314 527 1450
 Bussmann WEB site - <http://www.bussmann.com>

A **COOPER** Industries Company