


BS88 Joint Service Fuse Links

**Ferrule Type or Offset Bolted type Fuses 40 to 150 Amps 440V ac
Body Size '3'**

Time-Current Characteristic Curves

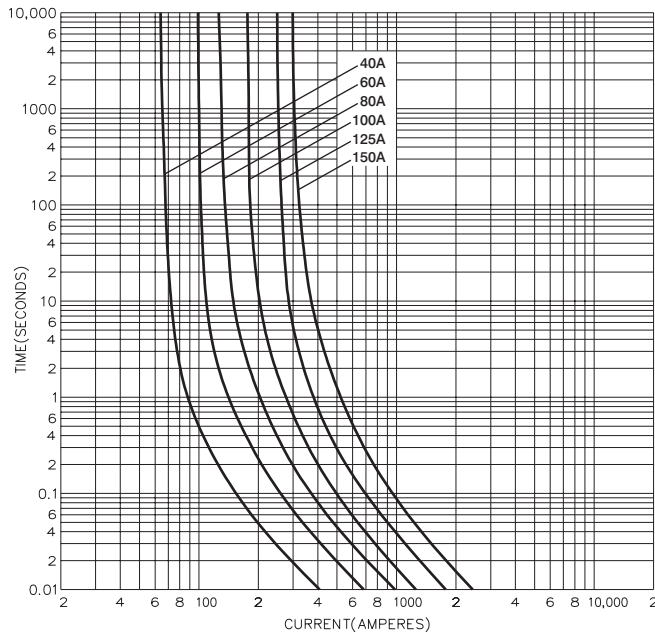


The range of Joint Service Fuse Links was originally developed for the Admiralty, but is now classified under the N.A.T.O. Reference system - Ref. Number 5920.99. The fuse links have been type approved and include short circuit tests to BS88, at 440 volts 33kA. Made to Defence Standard 59-96. The complete Joint Service range has been entered by Lloyd's Register of Shipping in their schedule 'A' cartridge fuses for use in all types of ships. Whilst intended for use by the Services, the fuse links are also suitable for normal industrial applications, being especially useful wherever space is at a premium, e.g. In the electronic, aeronautical and allied industries.


Packaging - 25 per carton.

Fuse Type and Ordering Code	Rating Amps	End Cap	I ² t (Amp ² Seconds)		Nom. Watts Loss
			Pre-Arcing	Total at 440V	
059-0152	40	Fer	1,700	5,110	6.96
059-0153	60	Fer	4,370	13,100	8.58
059-0154	80	Fer	9,360	28,080	10.80
059-0155	100	Fer	16,600	49,900	12.40
059-0126	40	OBT	1,700	5,110	6.96
059-0127	60	OBT	4,370	13,100	8.58
059-0128	80	OBT	9,360	28,080	10.80
059-0129	100	OBT	16,600	49,900	12.40
011-9128	125	OBT	34,500	103,500	10.75
011-9129	150	OBT	63,900	192,000	11.85

Dimensional Data (mm)

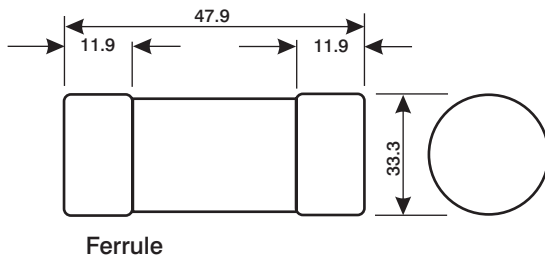

Ferrule

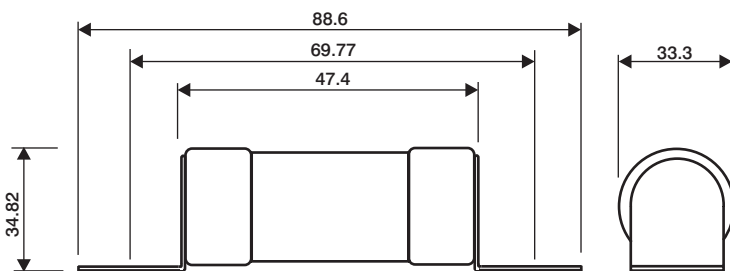

Offset Bolted Tag (OBT)



Bussmann Division
Cooper (U.K.) Ltd
 Burton-on-the-Wolds
 Leicestershire, LE12 5TH
 United Kingdom
 Tel: (44) (0)1509 88 27 37
 Fax: (44) (0)1509 88 27 86

Head Office
 St. Louis, MO, U.S.A. Tel: (314) 527-3877 Fax: (800) 544-2570 International Fax: (314) 527-1445



Bussmann Information Fax (00 1) 314 527 1450