

## Series 1384X

Edge Connectors –  
1 Sided Boards/Vertical Mount

### SPECIFICATIONS

**Rating:** 10A, 250V

**Center Spacing:** .375" or 3/8" (9.52 mm)

**Wire Range:** #14-22 AWG CU; entry to PC board at 90° angle.

**PC Board:** Edge contact accepts standard 1/16" (.0625) PCB.

**Contacts:** Cantilever design .020" thick phosphorus bronze with mating surface tin plated (.000200) over copper (.000050).

**Terminals:** Pressure plate terminals.

**Material:** Black, UL Rated 94V0 Thermoplastic (125°C)

**Operating Temperature:** -55°C to 105°C (212°F)


**Agency Information:** UL/CSA; CE Certified

13848-08G02B




13847-08T02B

### 13847 Series

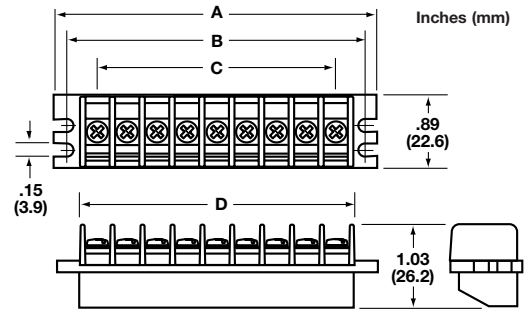

### 13848 Series

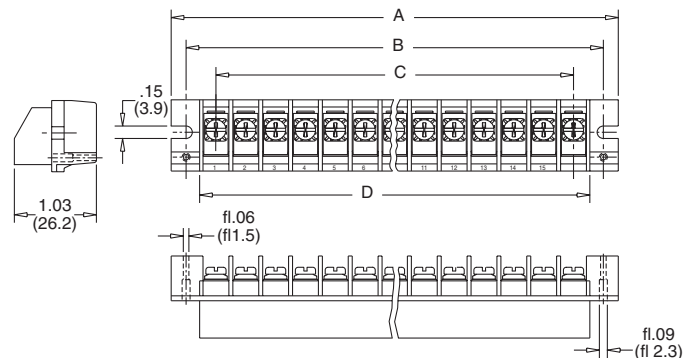

Poles	A	B	C	D
04	2.25	1.87	1.12	1.53
05	2.62	2.25	1.50	1.90
06	3.00	2.62	1.87	2.28
07	3.37	3.00	2.25	2.65
08	3.75	3.37	2.62	3.03
09	4.12	3.75	3.00	3.40
10	4.50	4.12	3.37	3.78
11	4.87	4.50	3.75	4.15
12	5.25	4.87	4.12	4.53
13	5.62	5.25	4.50	4.90
14	6.00	5.62	4.87	5.28
15	6.37	6.00	5.25	5.65
16	6.75	6.37	5.62	6.03

\* Dimensions in inches. To convert to millimeters, multiply by 25.4.  
Optional polarizing key (Part No. C5971) consult with factory.

## Part Numbering System

Inches (Millimeters)

Series

1 3 8 4

Block Style

7 - Flat mtg. ears w/ 2 slots

8 - Mtg. ears w/2 standoffs with hole for mounting strip

Poles

04 to 16

Terminal Plating

T - Tin over copper  
G - Gold\*

Screw Style

02 - #6-32 pan head. w/ SEMS wire clamp

Block Color

B - Black

Special Options

M - Marking strip

\* Consult Factory